




White Star Sky II DMX v2

ORDERCODE 40342

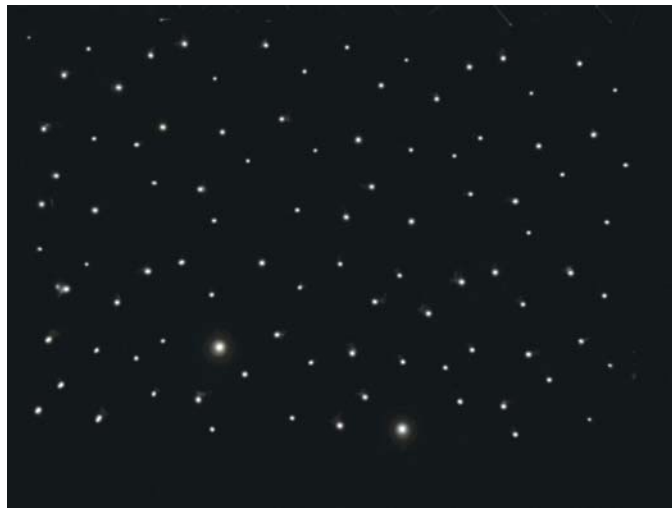

SHOWELECTRONICS FOR PROFESSIONALS

Congratulations!

You have bought a great, innovative product from Showtec.
The Showtec Star Sky 2 brings excitement to any venue.

You can rely on Showtec, for more excellent lighting products.
We design and manufacture professional light equipment for the entertainment industry.
New products are being launched regularly. We work hard to keep you, our customer, satisfied.
For more information: iwant@showtec.info

You can get some of the best quality, best priced products on the market from Showtec.
So next time, turn to Showtec for more great lighting equipment.
Always get the best -- with Showtec !

Thank you!



Showtec Star Sky 2™ Product Guide

Warning	2
Safety-instructions.....	2
Operating Determinations.....	3
Rigging.....	4
Description	5
Features.....	5
Set Up and Operation	5
Controller.....	6
DMX Dip Switch Value Guide.....	6
Maintenance	7
Replacing the Fuse.....	7
Troubleshooting	7
No Light.....	7
No Response to DMX	7
Product Specifications	8

WARNING



CAUTION!
Keep this device away from rain and moisture!



**FOR YOUR OWN SAFETY, PLEASE READ THIS USER MANUAL CAREFULLY
BEFORE YOUR INITIAL START-UP!**

SAFETY INSTRUCTIONS

Every person involved with the installation, operation and maintenance of this device has to:

- be qualified
- follow the instructions of this manual



CAUTION! Be careful with your operations.
**With a dangerous voltage you can suffer
a dangerous electric shock when touching the wires!**



Before your initial start-up, please make sure that there is no damage caused by transportation. Should there be any, consult your dealer and do not use the device.

To maintain perfect condition and to ensure a safe operation, it is absolutely necessary for the user to follow the safety instructions and warning notes written in this manual.

Please consider that damages caused by manual modifications to the device are not subject to warranty.

This device contains no user-serviceable parts. Refer servicing to qualified technicians only.

IMPORTANT:

The manufacturer will not accept liability for any resulting damages caused by the non-observance of this manual or any unauthorized modification to the device.

- Never let the power-cord come into contact with other cables! Handle the power-cord and all connections with the mains with particular caution!
- Never remove warning or informative labels from the unit.
- Never use anything to cover the ground contact.
- Never look directly into the light source.
- Do not open the device and do not modify the device.
- Never leave any cables lying around.
- Do not connect this device to a dimmerpack.
- Do not switch the device on and off in short intervals, as this would reduce the LEDs life.
- Never use the device during thunderstorms, unplug the device immediately.
- Do not shake the device. Avoid brute force when installing or operating the device. The Star Sky 2 reacts very sensitive to force.
- Only use device indoor, avoid contact with water or other liquids.
- Do not touch the Star Sky 2 bare-handed during its operation.
- Only operate the device after having familiarized with its functions.
- Avoid flames and do not put close to flammable liquids or gases.
- Always allow free air space of at least 50 cm around the unit for ventilation.
- Always disconnect power from the mains, when device is not used or before cleaning! Only handle the power-cord by the plug. Never pull out the plug by tugging the power-cord.
- Make sure that the device is not exposed to extreme heat, moisture or dust.
- Make sure that the available voltage is not higher than stated on the rear panel.

- Make sure that the power-cord is never crimped or damaged. Check the device and the power-cord from time to time.
- Make sure that the cable diameter of the extension cords and powercables are sufficient for the current consumption of the device.
- The powercable may not be modified, broken, mechanically strained, pressed together or heated.
- The cable insert or the female part in the device must never be strained. There must always be sufficient cable to the device. Otherwise, the cable may be damaged which may lead to deadly electrical shocks.
- If the external cable is damaged, it has to be replaced by a qualified technician.
- If the Star Sky 2 is obviously damaged, it has to be replaced. So that its functions are not impaired.
- Never hit the lighting cloth with a hammer or other tools, as this may lead to damaged LEDs.
- Never operate the device in the packaging or wrapped in order to avoid heating-up.
- This lighting cloth can be electrically connected with another cloth.
- If device is dropped or struck, disconnect mains power supply immediately. Have a qualified engineer inspect for safety before operating.
- If the device has been exposed to drastic temperature fluctuation (e.g. after transportation), do not switch it on immediately. The arising condensation water might damage your device. Leave the device switched off until it has reached room temperature.
- If your Showtec device fails to work properly, discontinue use immediately. Pack the unit securely (preferably in the original packing material), and return it to your Showtec dealer for service.
- For adult use only. Lighteffect must be installed out of the reach of children. Never leave the unit running unattended.
- Allow time to cool down, before storing the cloth in the bag.
- The user is responsible for correct positioning and operating of the Star Sky 2. The manufacturer will not accept liability for damages caused by the misuse or incorrect installation of this device.
- This device falls under protection class I. Therefore it is essential to connect the yellow/green conductor to earth.
- During the initial start-up some smell may arise. This is a normal process and does not necessarily mean that the device is defective.
- Repairs, servicing and electric connection must be carried out by a qualified technician.
- For replacement use and fuses of same type and rating only.
- WARRANTY: Till one year after date of purchase.



CAUTION ! EYEDAMAGES !.
Avoid looking directly into the light source.
(meant especially for epileptics) !



OPERATING DETERMINATIONS

This device is not designed for permanent operation. Consistent operation breaks will ensure that the device will serve you for a long time without defects.

The minimum distance between light-output and the illuminated surface must be more than 1 meter.

The maximum ambient temperature $t_a = 45^\circ\text{C}$ must never be exceeded.

The relative humidity must not exceed 50 % with an ambient temperature of 45°C .

If this device is operated in any other way, than the one described in this manual, the product may suffer damages and the warranty becomes void.

Any other operation may lead to dangers like short-circuit, burns, electric shock, crash etc.

You endanger your own safety and the safety of others!

Rigging

Please follow the European and national guidelines concerning rigging, trussing and all other safety issues.

Do not attempt the installation yourself !

Always let the installation be carried out by an authorized dealer !

Procedure:


- The Star Sky 2 must never be fixed swinging freely in the room.
- When rigging, derigging or servicing the device, always make sure, that the area below the installation place is blocked and staying in the area is forbidden.

Improper installation can cause serious damage to people and property !

Connection with the mains

Connect the device to the mains with the power-plug.

Always pay attention, that the right color cable is connected to the right place.

Cable	Pin	International
BROWN	FASE	L
BLUE	NUL	N
YELLOW/GREEN	EARTH	

Make sure that the device is always connected properly to the earth!

Description of the device

Features

The Showtec Star Sky 2 is a light effect with great effects.

- Total width 6m, total length 3m.
- DMX controller, carrying bag included
- 4 DMX Channels (4x Fade Control)
- 2 Versions available: White LEDs (40342) or Coloured LEDs (40343)

Overview



Fig. 1

Set Up and Operation


Follow the directions below, as they pertain to your preferred operation mode.

Before plugging the unit in, always make sure that the power supply matches the product specification voltage. Do not attempt to operate a 120V specification product on 230V power, or vice versa.

Damages caused by non-observance are not subject to warranty.

CH1	0-20 OFF 21-223 Fade from Slow to Fast 224-255 ON
CH2	0-20 OFF 21-223 Fade from Slow to Fast 224-255 ON
CH3	0-20 OFF 21-223 Fade from Slow to Fast 224-255 ON
CH4	0-20 OFF 21-223 Fade from Slow to Fast 224-255 ON
CH5	When Fader 5 is set to 100%, the Star Sky functions as a 4-channel Stand-alone device. You can control 4 different groups of LEDs.

Controller

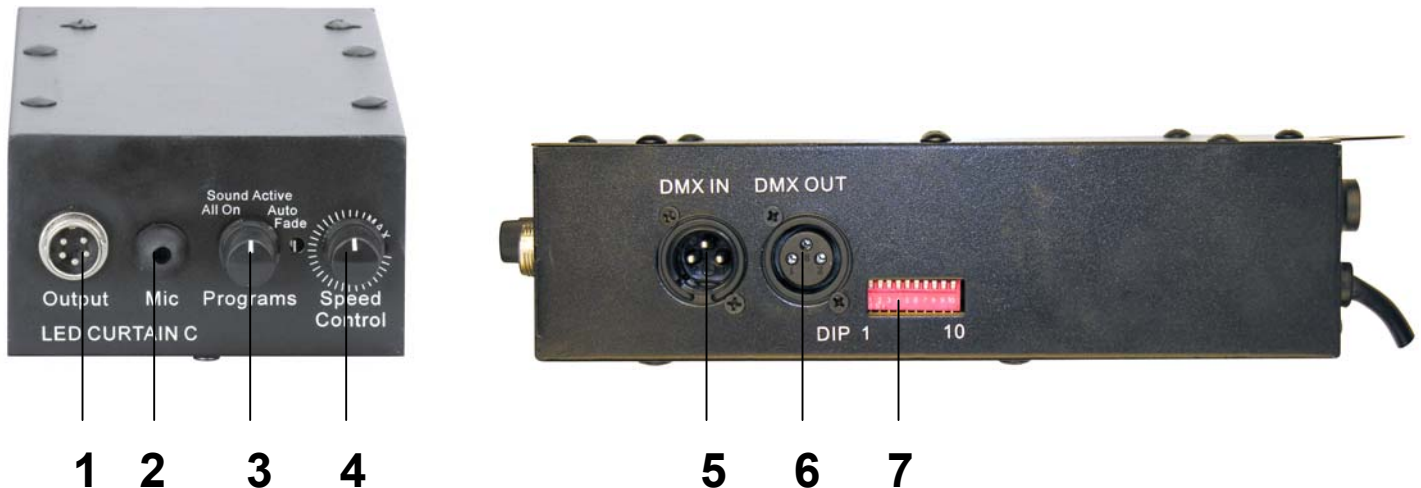

- 1) Output
- 2) Mic
- 3) Programs: All On / Sound Active / Auto / Fade
- 4) Speed Control
- 5) DMX IN
- 6) DMX OUT
- 7) Dip Switches

DMX Dip Switch Value Guide

DMX products must have their own "address" to receive DMX signals. Addresses on the controller are set by flipping the appropriate DMX dip switches.

Dip Switch no.	1	2	3	4	5	6	7	8	9	10
Starting address	1	2	4	8	16	32	64	128	256	512

You need to know that DMX address settings are the sum of the dip switch values.

A standard DMX address for a Showtec Star Sky, which has four channels (CH1=Speed, CH2=Speed, CH3=Program and CH4=Program) is as follow:

Example

Star Sky	Address Value	DMX Dip Switches "ON"
Unit 5	17	#1 , #5

Switch	Value
#1	1
#5	16 +
Total sum	17

Explanation: Since each unit has four channels, each address advances four values (See Address Value above).

Once address values are determined, add DMX dip switch values to obtain the appropriate address (DMX Dip Switches "ON") for each unit. Flip appropriate DMX dip switches on each unit.

Maintenance

The Showtec Star Sky 2 requires almost no maintenance. However, you should keep the unit clean. Otherwise, the fixture's light-output will be significantly reduced. Disconnect the mains power supply, and then wipe the cover with a damp cloth. Do not immerse in liquid. The housing will require monthly cleaning, as smoke-fluid tends to build up residues, reducing the light-output very quickly. Do not use alcohol or solvents. Keep connections clean. Disconnect electric power, and then wipe the connections with a damp cloth. Make sure connections are thoroughly dry before linking equipment or supplying electric power.

The operator has to make sure that safety-relating and machine-technical installations are to be inspected by an expert after every four years in the course of an acceptance test. The operator has to make sure that safety-relating and machine-technical installations are to be inspected by a skilled person once a year.

The following points have to be considered during the inspection:

1. All screws used for installing the device or parts of the device have to be tightly connected and must not be corroded.
2. There may not be any deformations on housings, fixations and installation spots.
3. The electric power supply cables must not show any damages or material fatigue.

Replacing a Fuse

Power surges, short-circuit or inappropriate electrical power supply may cause a fuse to burn out. If the fuse burns out, the product will not function whatsoever. If this happens, follow the directions below to do so.

1. Unplug the unit from electric power source.
2. Insert a flat-head screwdriver into a slot in the fuse cover. Turn the screwdriver to the left, at the same time gently push a bit (Turn and Push). The fuse will come out.
3. Remove the used fuse. If brown or unclear, it is burned out.
4. Insert the replacement fuse into the holder where the old fuse was. Reinsert the fuse cover. Be sure to use a fuse of the same type and specification. See the product specification label for details.

Troubleshooting

No Light

This troubleshooting guide is meant to help solve simple problems. If a problem occurs, carry out the steps below in sequence until a solution is found. Once the unit operates properly, do not carry out following steps.

If the light effect does not operate properly, refer servicing to a technician.

Response: Suspect two potential problem areas: the power supply, the LEDs.

1. Power supply. Check that the unit is plugged into an appropriate power supply.
2. The LED. Return the device to your Showtec dealer.

No Response to DMX

Response: Suspect the DMX cable or connectors, a controller malfunction, a light effect DMX card malfunction.

1. Check the DMX cable: Unplug the unit; change the DMX cable; then reconnect to electrical power. Try your DMX control again.
2. Determine whether the controller or light effect is at fault. Does the controller operate properly with other DMX products? If not, take the controller in for repair. If so, take the DMX cable and the light effect to a qualified technician.

Product Specification

Model: Showtec Star Sky 2

Power supply: 240V-50Hz (CE)

Fuse; 2A

Length: 6m.

Width: 3m.

Weight: 5 kg

Minimum distance:

Minimum distance from flammable surfaces: 0.5m

Minimum distance to lighted object: 1m

Design and product specifications are subject to change without prior notice.





© 2006 Showtec.